

**Principles of Information and  
Database Management  
198:336**

**Week 8 – Mar 28**

Matthew Stone

**XML – Motivations**

**Semi-structured data**

- Relaxing traditional schema
- Storing more complex objects

**Standardized data**

- Using reference schemas for interoperability
- “Meta-data” – language for data description

**Web data**

- Supported in protocols for information exchange

## Outline

XML – overview

XML data representations

XML and standardization

- XML namespaces
- XML resource description framework

XML and the web

- XHTML
- Cascading style sheets and XSLT

## XML

eXtensible Markup Language

- “File format” for giving partial structure to text documents.
- Based on the use of **paired tags** to give a **tree structure** to the document.

## Tags in XML


Work like parentheses...

$$[(5 + 7) * 3]^2$$

But make category of structure explicit

```
power(product(sum(5,7), 3), 2)
```

## Tree visualization

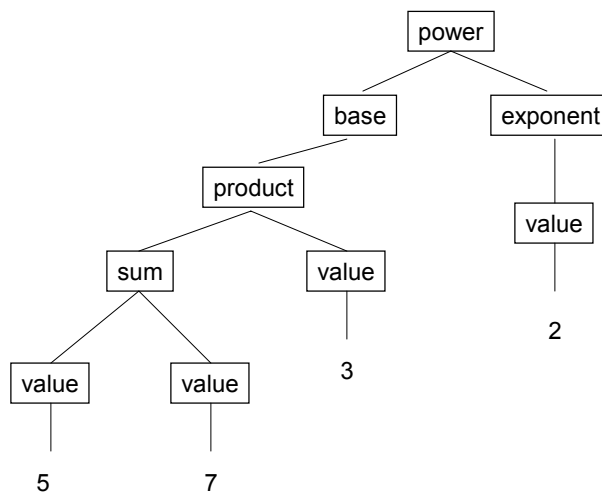

## Basic tag syntax

<tag>

– open a tag

</tag>

– close a tag

## Example becomes

```
<power>
  <base>
    <product>
      <sum>
        <value>5</value>
        <value>7</value>
      </sum>
      <value>3</value>
    </product>
  </base>
  <exponent><value>2</value></exponent>
</power>
```

## **Storing data in XML**

### Relational data

- Combines schema and tuples together

### Example

- Schema  
student(id:integer, name:string, email:string)
- Tuple  
(65, "Teddy Salad", tds@mp.com")

## **Storing relational data in XML**

In XML, encode table

```
<student>
```

```
...
```

```
</student>
```

## **Storing relational data in XML**

Then columns...

```
<student>  
<id> ... </id>  
<name> ... </name>  
<email> ... </email>  
</student>
```

## **Storing relational data in XML**

Then values...

```
<student>  
<id>65</id>  
<name>Teddy Salad</name>  
<email>tds@mp.com</email>  
</student>
```

## Storing relational data in XML

For whole tables, just repeat

```
<tableOfStudents>
  <student>
    <id>64</id>
    <name>Anne Elk</name>
    <email>ae@bronto.mp.com</email>
  </student>
  <student>
    <id>65</id>
    <name>Teddy Salad</name>...
```

## Storing data in XML

Text data

- Elements can be freeform text
- Elements can be further “marked up” to indicate presentation or structure

## Storing text data in XML the basics

<text>

Elk: Yes, well you may well ask me what is my theory.

Presenter: I am asking.

Elk: Good for you. My word yes. Well Chris, what is it that it is – this theory of mine. Well, this is what it is – my theory that I have, that is to say, which is mine, is mine.

</text>

## Storing text data in XML markup

<drama>

<line><player>Elk</player>

<content>Yes, well you may well ask me what is my theory.</content></line>

<line><player>Presenter</player>

<content>I <loud>am</loud> asking.</content></line>

<line><player>Elk</player>

<content>Good for you. My word yes. Well Chris, what is it that it is – this theory of mine. Well, this is what it is – my theory that I have, that is to say, which is mine, is mine.</content></line>

</drama>



## Storing data in XML

Mix – partly well-defined, partly open-ended

- Example: product descriptions
- Name, description – formatted text
- Nutrition information – content FDA requires

## Storing mixed data in XML

```
<product>
<info><name>California trail mix</name>
<description>We mix sweet <loud>ripe</loud> fruit with
  <loud>premium</loud> nuts to bring you the taste of <loud>pure
  energy</loud>...</description></info>
<nutrition><servings><size>1/4 cup</size>
  <per>about 27</per></servings>
  <calories><total>120</total>
  <fat>25</fat></calories>
  ... </nutrition>
</product>
```

## **Describing data**

DTDs – “document type definitions”

- Original proposal for XML
- Describes possible patterns of elements
- Grammar with regular expression syntax

## **DTD examples**

```
<!ELEMENT loud (#PCDATA) >
```

```
<!ELEMENT description (#PCDATA | loud)* >
```

```
<!ELEMENT name (#PCDATA) >
```

```
<!ELEMENT info (name, description) >
```

## **DTDs**

Not very specific

- Don't constrain types of values
- Don't indicate links to standards
- Can only see one layer of structure at a time

## **XML Schema**

Give a template for a document

- as more XML!
- Complicated syntax, but powerful.

## **XML Schema examples**

Loud

```
<element name="loud" type="string" />
```

Name

```
<element name="name" type="string" />
```

## **Hey, what's all that junk?**

XML also has empty tags

```
<foo></foo>
```

is the same as

```
<foo />
```

## **Hey, what's all that junk?**

XML also has attributes on opening tags

```
<tag attribute="value" >
```

## **Hey, what's all that junk?**

So

```
<element name="loud" type="string" />
```

Defines an empty element

```
<element name="loud"  
        type="string"></element>
```

- Whose name attribute has value "loud"
- Whose type attribute has value "string"

## **XML Schema Examples**

### Description

```
<element name="description">  
  <complexType mixed="true">  
    <choice minOccurs="0"  
      maxOccurs="unbounded">  
      <element name="loud" type="string" />  
    </choice>  
  </complexType>  
</element>
```

## **XML Schema Examples**

### Easier to define your own types

```
<complexType name="descriptionType" mixed="true">  
  <choice minOccurs="0"  
    maxOccurs="unbounded">  
    <element name="loud" type="string" />  
  </choice>  
</complexType>
```

## **XML Schema Examples**

### **Info**

```
<complexType name="infoType">
  <sequence>
    <element name="name" type="string" />
    <element name="description"
      type="descriptionType" />
  </sequence>
</complexType>
<element name="info" type="infoType" />
```

## **What's the point?**

Even with semi-structured data

- You can check that your data falls in a specific range of possibilities
- Validation

Problems:

What about files created by scripts?

## **Standardization**

What schema are you using?

- Does your element <name> mean the same thing as my element <name>?
- If your license gives me  
<permission action="copy" />  
do I really know what I can do with your data?

## **Key principle**

Need a way to uniquely identify tokens as instances of known concepts.

Compare: UPC codes, ISBN numbers



## **Solution**

### Use URLs/URIs

- Uniform resource locators
- Uniform resource identifiers

Build on the existing infrastructure to avoid clashing names on the web.

## **Example**

The official DTD for XHTML 1.0 strict

- A standard for describing hypertext web documents as XML

lives here

<http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd>

(a URL)

## **Example**

A standard reference for the concepts associated with XHTML is this URI

<http://www.w3.org/1999/xhtml>

Using this “namespace” means your intended meaning for your document is what is spelled out there.

## **Using namespaces**

```
<tag1 xmlns:ns="URI">  
  .... <ns:tag2 ... />  
</tag1>
```

Declared using xmlns attribute

Used using “.” syntax

## Metadata

### Data about data

- We've seen one example: schemas
- If you are building a document that respects a particular XML Schema, you can say so

```
<product xmlns="URL"  
  xmlns:xsi=http://www.w3c.org/2001/XMLSchema-instance  
  xsi:schemaLocation="URL2">  
...  
</product>
```

## Metadata

### In general, XML metadata is

- An XML description in a specified language
- That you link to as a specified attribute of designated elements

## **Resource Description Framework**

RDF is a particular set of concepts for describing metadata

- Also known as “the semantic web”

Includes

- “Dublin core” concepts for computer science and representation
- OWL and DAML concepts for services
- eXtensibly linked to other concept sets

## **Example: Creative Commons**

<http://www.creativecommons.org>

- Develops culture-friendly licenses for distributing web content
- Motto: “some rights reserved”
  
- Licenses are distributed as RDF files granting specific permissions and reserving rights
- Creative commons maintains an XML namespace and URIs for licences and concepts used in them.

## **Querying XML**

How do you find places in a tree?

By nodes

- Category
- Attributes

By paths

- Location
- Ancestor
- Child
- Sequence

## **Example: XML stylesheets**

Controls the layout of XML data when presented in a web browser.

Rules of the form

Pattern { Actions }

Patterns can be seen as queries over data trees.

## **Stylesheet patterns**

### Category

- Matches any node of type Category

### Category.sub

- Matches any node of type Category whose class attribute has the value “sub”

## **Stylesheet patterns**

### ParentType > ChildType

- Matches any node of ChildType whose parent is a node of type ParentType

### ParentType ChildType

- Matches any node of ChildType that has an ancestor of type ParentType

## **Stylesheet patterns**

Attribute selectors (new)

myElement[myAttribute]

myElement[myAttribute="myValue"]

myElement[myAttribute~="myValue"]

myElement[myAttribute|="myValue"]

## **Key points**

Classic issues in data

- Design
- Representation
- Query
- Declare
- Tell
- Validate